

**VANTAGE
AIR**

18865 GOLL ST. - SAN ANTONIO, TX. - 78266 - ph.210-654-7171 - fax 210-654-3113

INSTALLATION INSTRUCTIONS FOR
1968-69 CHEVELLE
W/O FACTORY AIR CONDITIONING
(55069-VCZ-A)

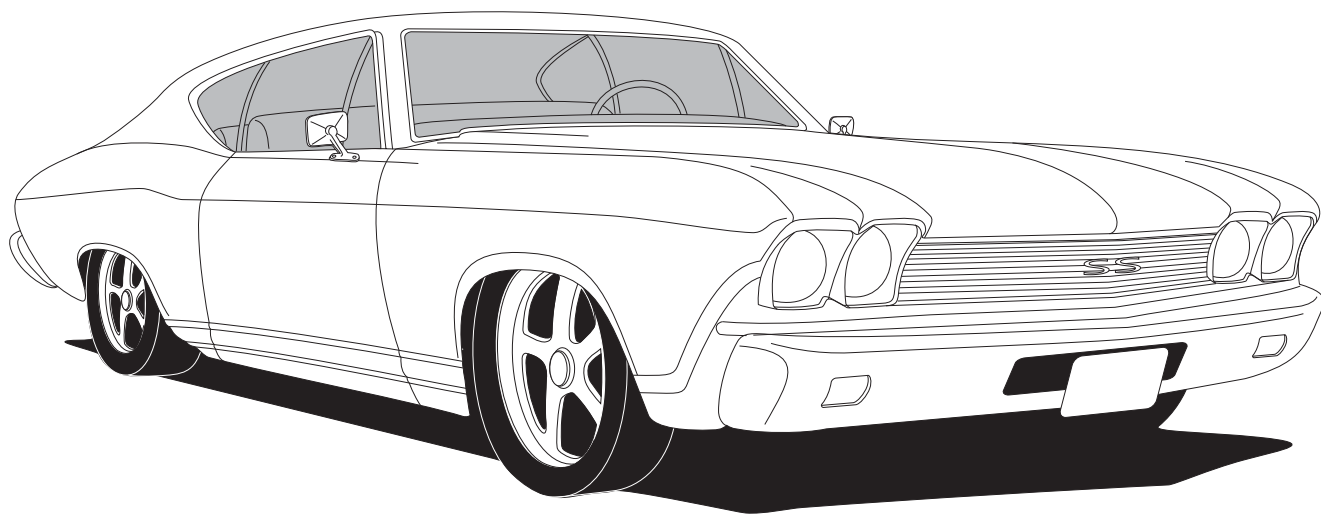


Table of Contents



PAGES

1. COVER
2. TABLE OF CONTENTS
3. PACKING LIST
4. INFORMATION PAGE
5. PASSENGER COMPARTMENT
-FIGURE 1
6. OEM CONTROL MODIFICATION
-FIGURES 2 & 3
7. EVAPORATOR INSTALLATION
-FIGURES 4-4A
8. EVAPORATOR INSTALLATION CONT.
-FIGURES 5-5C
9. DUCT HOSE ROUTING
-FIGURES 6-6A
10. CONTROL LEVER OPERATION *FIGURE 7*
-PASSENGER SIDE KICK PANEL MODIFICATION *FIGURE 7A*
-GLOVE BOX INSTALLATION *FIGURE 7B*
11. RADIATOR SUPPORT MODIFICATION
-FIGURE 8
OEM CABLE INSTALLATION
-FIGURE 9
12. ENGINE COMPARTMENT
-FIGURES 10 & 11
13. CONDENSER INSTALLATION
-FIGURE 12
14. HOSE ROUTING+
-FIGURE 13
15. OPERATION OF CONTROLS
16. AIR CONDITIONING ADJUSTMENTS
17. WIRING DIAGRAM
18. EVAPORATOR KIT PACKING LIST

**1968-69 CHEVELLE w/o FACTORY AIR
EVAPORATOR KIT PACKING LIST**
**EVAPORATOR KIT
55069-VCZ-A**

No.	QTY.	PART No.	DESCRIPTION
1.	1	55369-VCE-A	EVAPORATOR SUBCASE
2.	1	78169-ACN	1968-70 CHEVELLE W/O AC ACCESSORY KIT

**** BEFORE BEGINNING INSTALLATION OPEN ALL PACKAGES AND CHECK CONTENTS OF SHIPMENT. PLEASE REPORT ANY SHORTAGES DIRECTLY TO VINTAGE AIR WITHIN 15 DAYS. AFTER 15 DAYS, VINTAGE AIR WILL NOT BE RESPONSIBLE FOR MISSING OR DAMAGED ITEMS.**

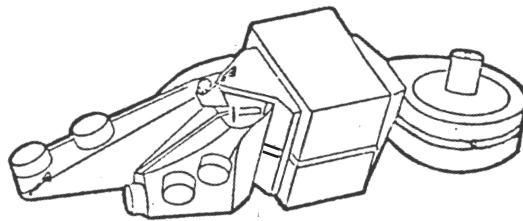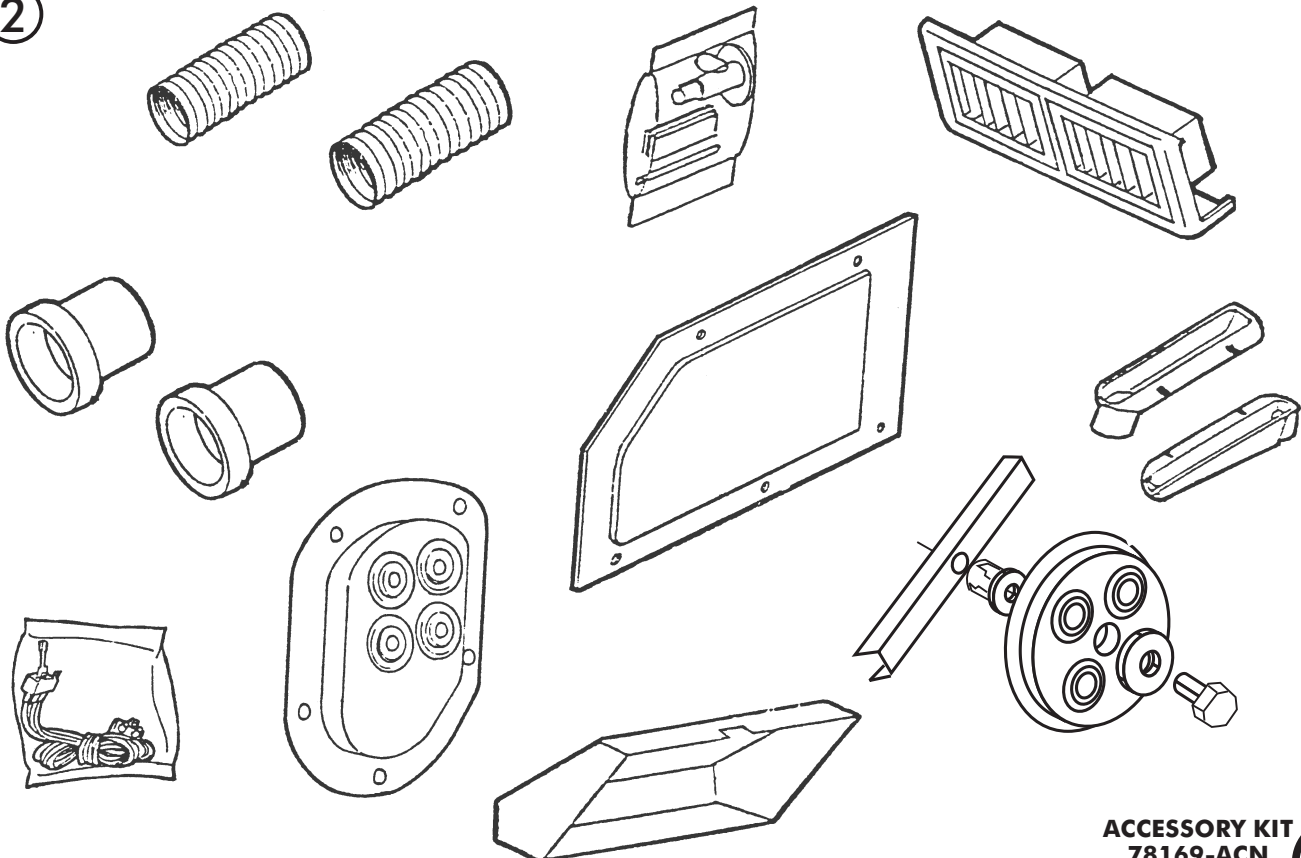①

②

**ACCESSORY KIT
78169-ACN**
3

1968-69 CHEVELLE

W/O FACTORY AIR CONDITIONING

IMPORTANT NOTICE-PLEASE READ

THIS KIT DOES NOT CONTAIN HEATER HOSE. YOU MUST PURCHASE 8 FEET OF 5/8" DIA. HEATER HOSE FROM VINTAGE AIR(31800-VUD) OR FROM YOU LOCAL PARTS RETAILER

SAFETY SWITCHES:

YOUR VINTAGE AIR SYSTEM IS EQUIPPED WITH A BINARY PRESSURE SAFETY SWITCH. A BINARY SWITCH (11078-VUS) DISENGAGES THE COMPRESSOR CLUTCH IN CASE OF EXTREME LOW PRESSURE CONDITION (REFRIGERANT LOSS) OR EXCESSIVELY HIGH HEAD PRESSURE (406 lb.), TO PREVENT COMPRESSOR DAMAGE OR HOSE RUPTURE. A TRINARY SWITCH (11076-VUS) COMBINES HI/LO PRESSURE PROTECTION WITH AN ELECTRIC FAN OPERATION SIGNAL AT 254 lbs., AND MAY BE SUBSTITUTED FOR USE WITH ELECTRIC CONDENSER FANS. COMPRESSOR SAFETY SWITCHES ARE EXTREMELY IMPORTANT SINCE AN A/C SYSTEM RELIES ON REFRIGERANT TO CARRY LUBRICATION THROUGH THE SYSTEM.

SERVICE INFO:

EVACUATE THE SYSTEM FOR 35-45 MINUTES WITH SYSTEM COMPONENTS (DRIER, COMPRESSOR, EVAPORATOR AND CONDENSER) AT A TEMPERATURE OF AT LEAST 85° F. ON A COOL DAY THE COMPONENTS CAN BE HEATED WITH A HEAT GUN OR BY RUNNING THE ENGINE WITH THE HEATER ON BEFORE EVACUATING. LEAK CHECK AND CHARGE TO SPECIFICATIONS.

THE PROPER AMOUNT OF REFRIGERANT IS CRITICAL TO PROPER SYSTEM OPERATION. VINTAGE AIR RECOMMENDS OUR SYSTEMS BE CHARGED BY WEIGHT WITH A QUALITY CHARGING STATION OR SCALE.

REFRIGERANT CAPACITIES

134a SYSTEM

CHARGE WITH 1.8 lbs.
(1lbs. 12ozs) OF REFRIGERANT

R-12 SYSTEM

CHARGE WITH 2.0 lbs. OF REFRIGERANT

LUBRICANT CAPACITIES

NEW COMPRESSOR - NO ADDITIONAL OIL NEEDED
USED COMPRESSOR - CONSULT VINTAGE AIR

PASSENGER COMPARTMENT

BEFORE STARTING INSTALLATION, CHECK THE FUNCTION OF THE VEHICLE (HORN, LIGHTS, ETC.) FOR PROPER OPERATION. STUDY THE INSTRUCTIONS, ILLUSTRATIONS, AND DIAGRAMS. DISCONNECT BATTERY.

1. REMOVE STEERING COLUMN COVER.
2. DROP STEERING COLUMN DOWN.
3. DROP GAUGE PANEL DOWN.
4. REMOVE GLOVE BOX DOOR.
5. REMOVE GLOVE BOX (DISCARD).
6. REMOVE OEM SIDE VENTS.
7. REMOVE OEM CONTROL PANEL.
8. REMOVE PASSENGER SIDE KICK PANEL.
9. REMOVE OEM HEATER/AC COVER - DISCARD (INNER FENDER MUST BE LOOSENEED & LOWERED DOWN TO ALLOW REMOVAL. NOTE: CAR MAY NEED TO BE JACKED UP SLIGHTLY TO ALLOW ENOUGH SPACE FOR UNIT TO BE REMOVED).
10. REMOVE OEM HEATER (DISCARD).
11. REMOVE OEM DEFROST DUCTS (DISCARD).
12. REMOVE KICK-PANEL VACUUM DOOR.

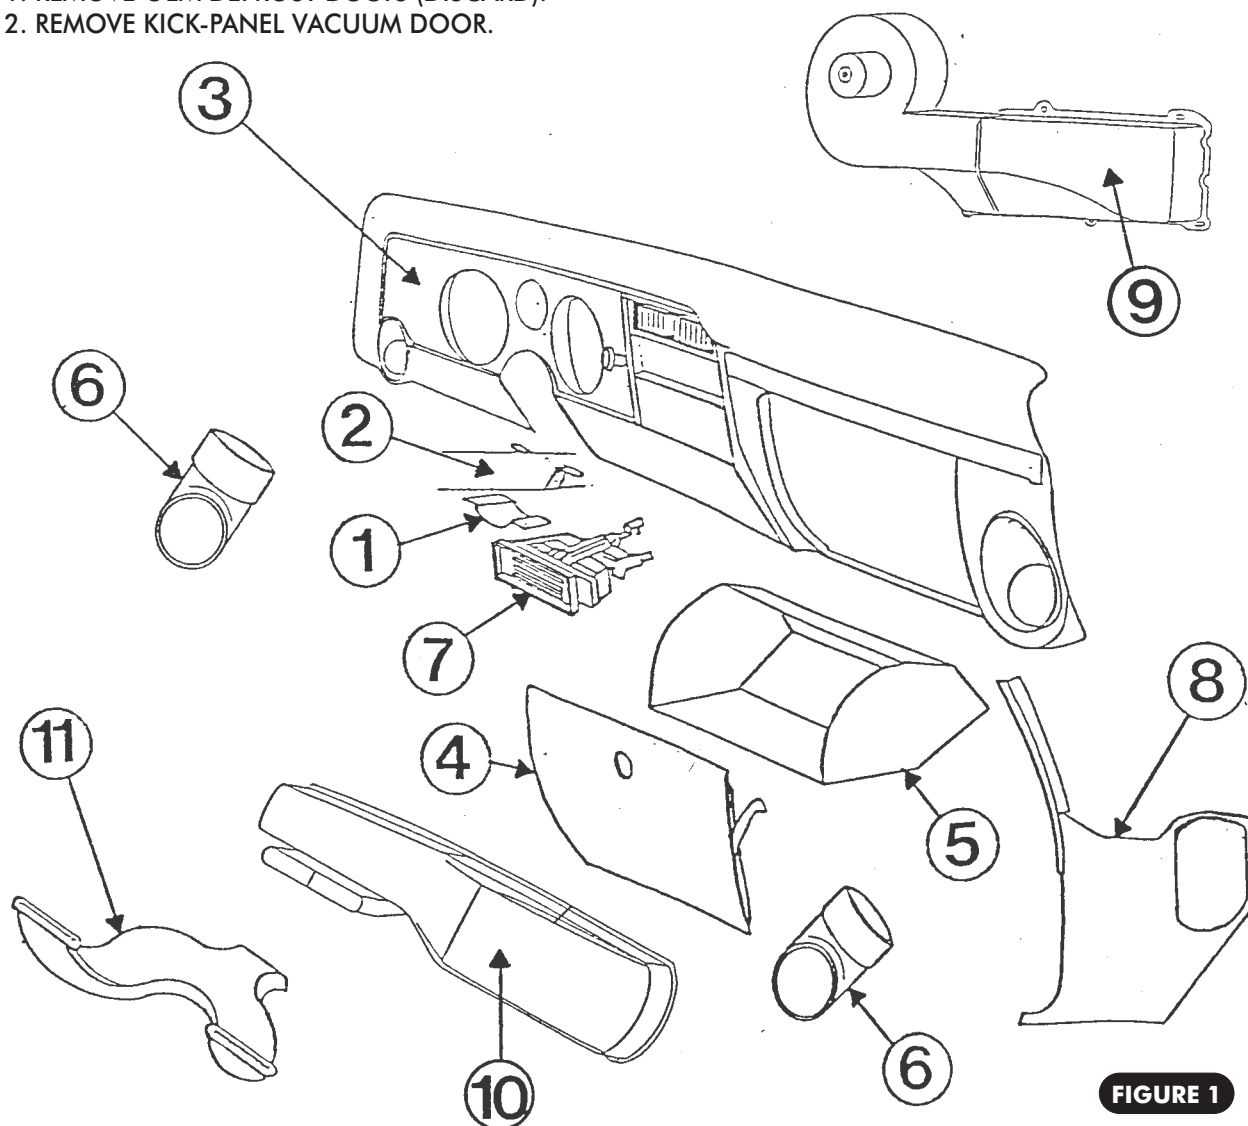


FIGURE 1

CENTER LOUVER INSTALLATION

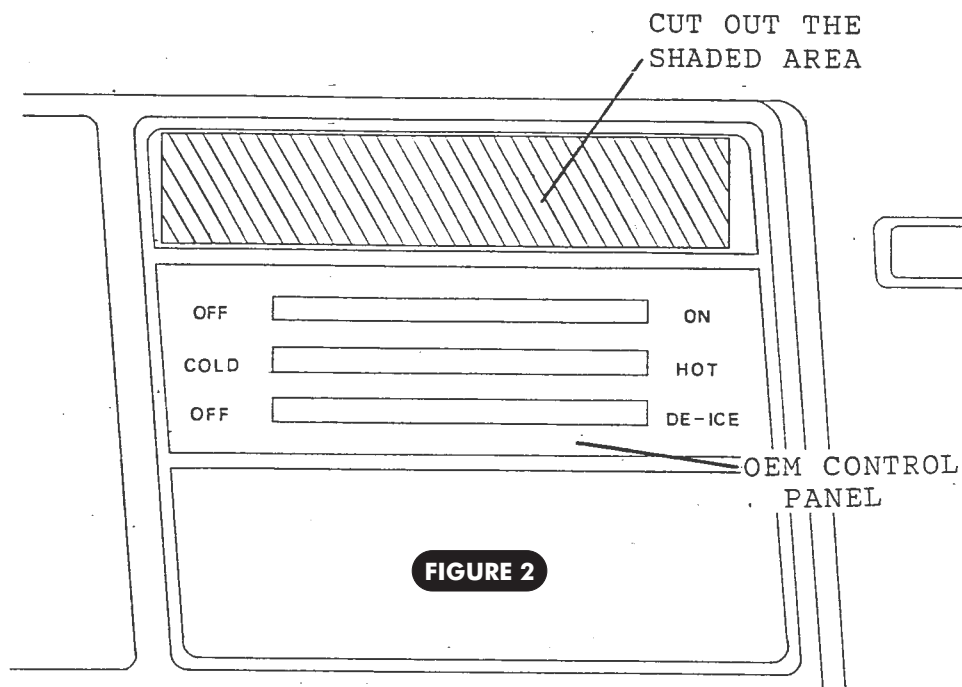


FIGURE 2

1. CUT OUT THE CENTER OF THE PANEL ABOVE THE OEM CONTROL PANEL, SEE FIGURE 2 ABOVE. USE THE NEW CENTER LOUVER ASSEMBLY (SUPPLIED) AS A TEMPLATE, BE SURE NOT OVER SIZE THE HOLE.
2. AFTER THE PANEL IS CUT OUT, INSTALL THE NEW CENTER LOUVER ASSEMBLY AND SECURE USING THE OEM HOLES IN DASH PANEL. SEE FIGURE 3 BELOW.

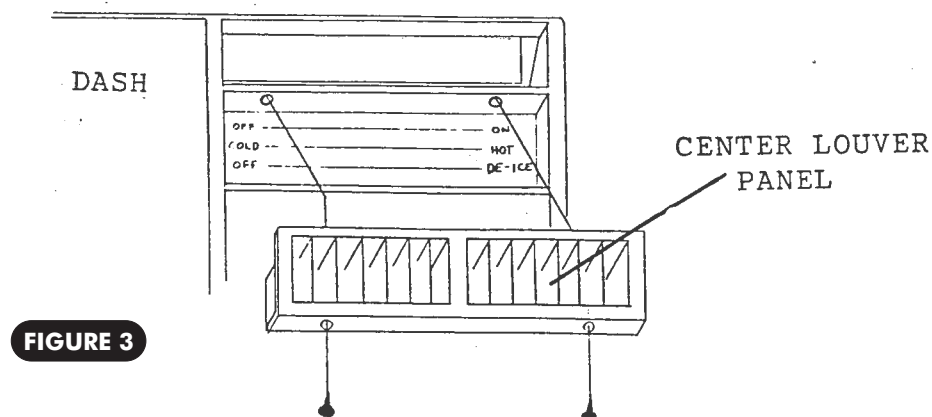
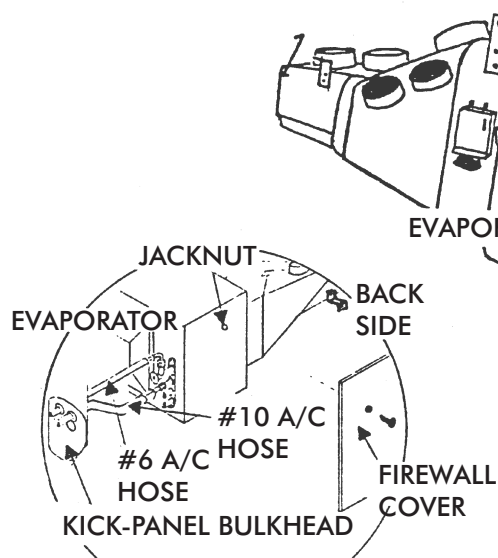
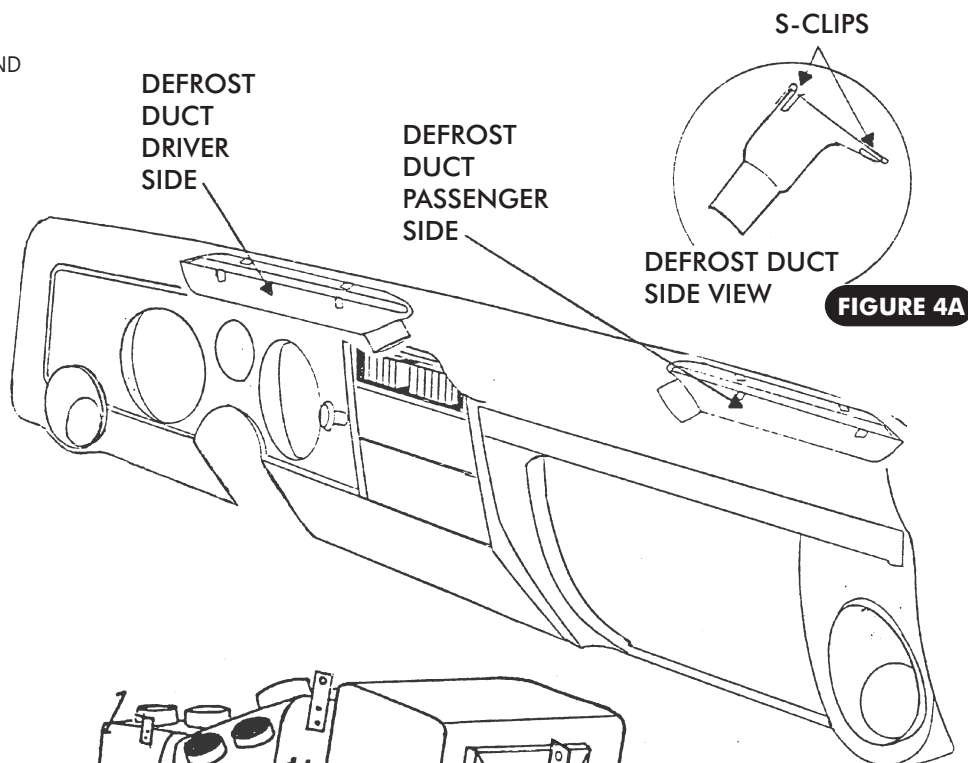
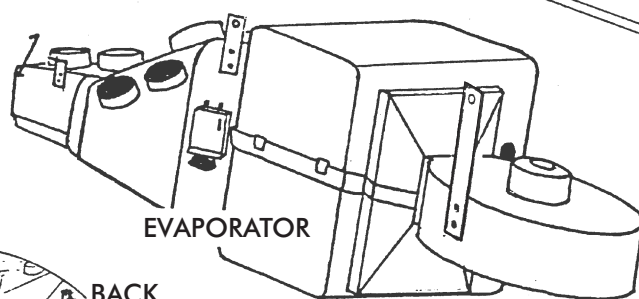
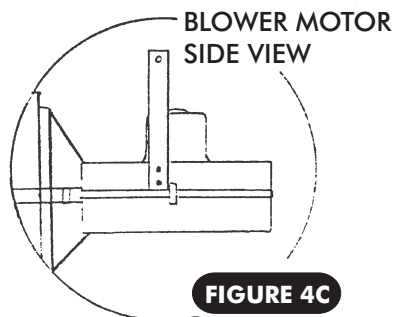


FIGURE 3

EVAPORATOR INSTALLATION


1. INSTALL DEFROSTER DUCTS ON PASSENGER AND DRIVER SIDE AS FIGURE 4 SHOWS AND ATTACH TO DASH VENTS AS FIGURE 4A SHOWS.
2. LAY THE EVAPORATOR ON THE FLOORBOARD AND ATTACH #6 & #10 A/C HOSES AS FIGURE 4B SHOWS. IT IS ALSO NECESSARY TO INSTALL THE HEATER HOSES AT THIS TIME AS FIGURE 7 SHOWS ON PAGE 10. THE HEATER HOSES PASS THRU THE LOWER HOLES IN BOTH BULKHEADS AND FOLLOW THE SAME ROUTING OUT OF THE PASSENGER COMPARTMENT AS THE A/C HOSES (REFER TO PAGE 14).
3. ATTACH BLOWER HOUSING BRACKET AS FIGURE 4C SHOWS.

NOTE: PRIOR TO RAISING EVAPORATOR UNIT BEHIND DASH, CONNECT WIRING HARNESS PER DIAGRAM ON PAGE 17. BE SURE TO CONNECT BLACK WIRE FROM A/C TERMINAL ON BLOWER SWITCH TO A/C MICROSWITCH ON TOP OF EVAPORATOR PLENUM.



FIGURE 4B

FIGURE 4

FIGURE 4C

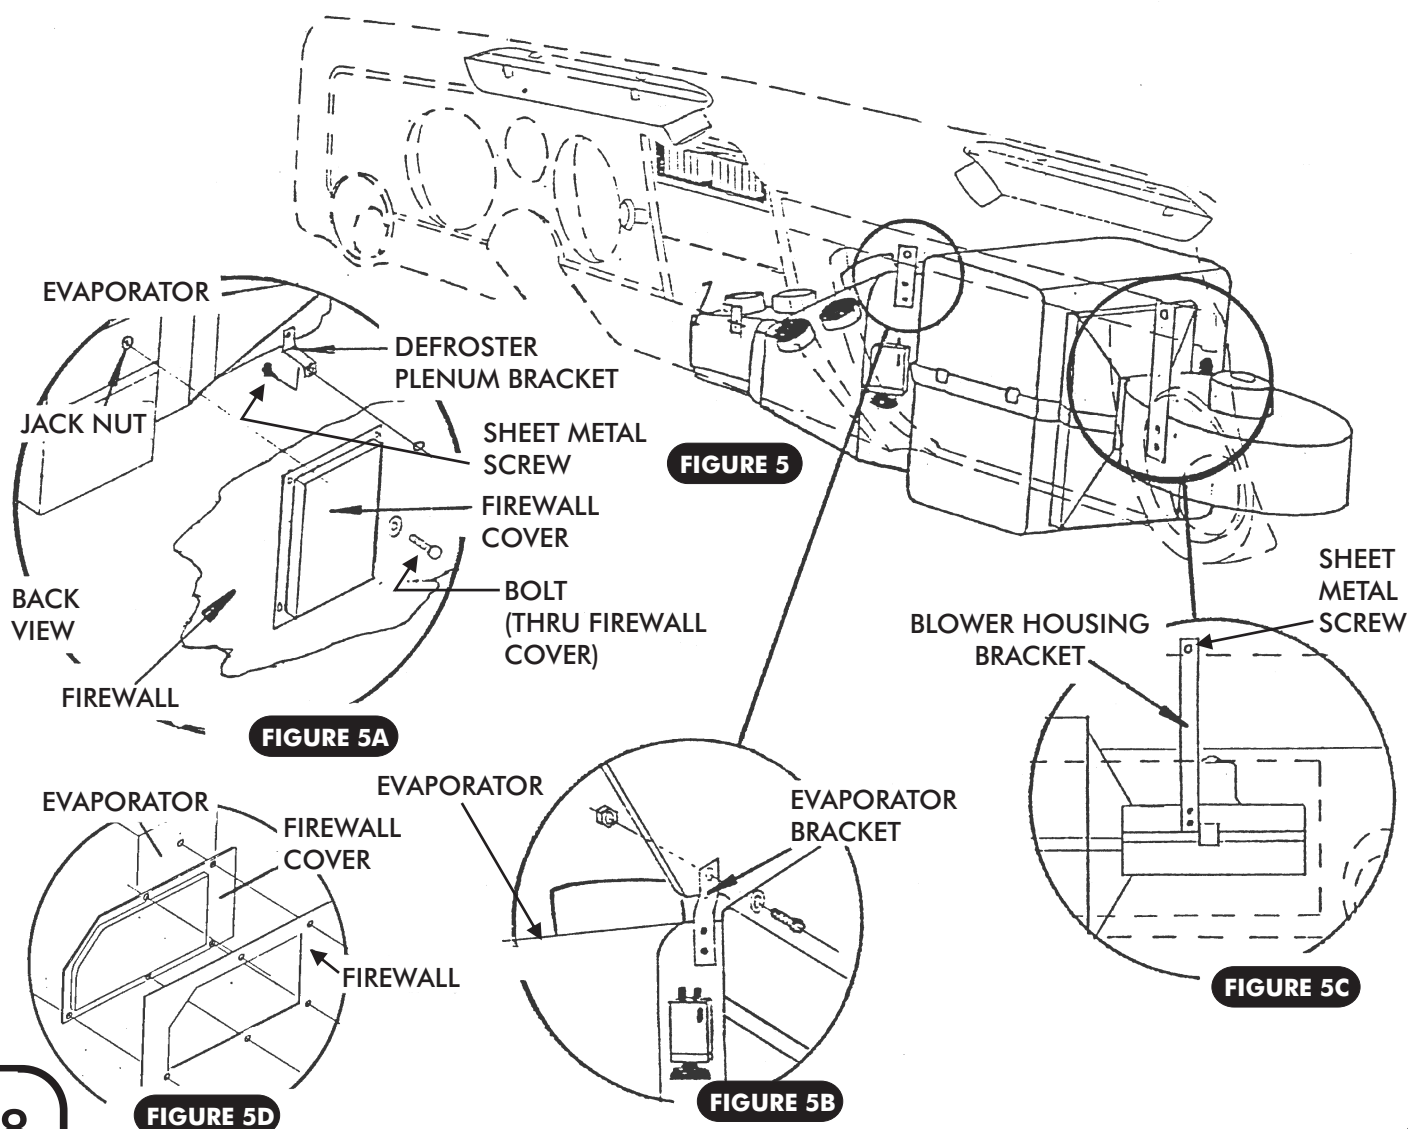4. INSTALL FIREWALL COVER TO ENGINE SIDE OF FIREWALL USING ORIGINAL HARDWARE. APPLY A THIN BEAD OF SILICONE AROUND INSIDE EDGE OF FIREWALL COVER BEFORE INSTALLING. RAISE EVAPORATOR UP AND POSITION UNDER DASH. THE BACK OF THE EVAPORATOR IS SUPPORTED BY A BOLT THRU THE FIREWALL COVER (FROM ENGINE COMPARTMENT) TO THE JACKNUT IN THE BACK OF THE EVAPORATOR CASE (SEE FIGURE 5a).
5. ATTACH THE EVAPORATOR BRACKET DIRECTLY TO THE BRACING UNDER THE DASH (SEE FIGURE 5b).
6. ATTACH THE DEFROSTER PLENUM BRACKET DIRECTLY TO THE FIREWALL, USING A SHEET METAL SCREW (SUPPLIED), AS SHOWN IN FIGURE 5a.
7. ATTACH THE BLOWER HOUSING BRACKET TO THE UNDER-DASH PANEL, USING A SHEET METAL SCREW, (SUPPLIED), AS SHOWN IN FIGURE 5c.
8. FIGURE 5D SHOWS THE FIREWALL COVER INSTALLATION FOR CARS WITHOUT A FACTORY AIR FIREWALL.

NOTE: STEPS 6 & 7 MAY REQUIRE DRILLING A 1/8" HOLE TO GET THE SCREW STARTED. IF SO, USE THE LOCATION OF THE BRACKET AS A GUIDE FOR MARKING THE HOLES TO BE DRILLED. MACHINE SCREWS WITH NUT MAY BE SUBSTITUTED FOR SHEET METAL SCREWS IF DESIRED. (NOT SUPPLIED)

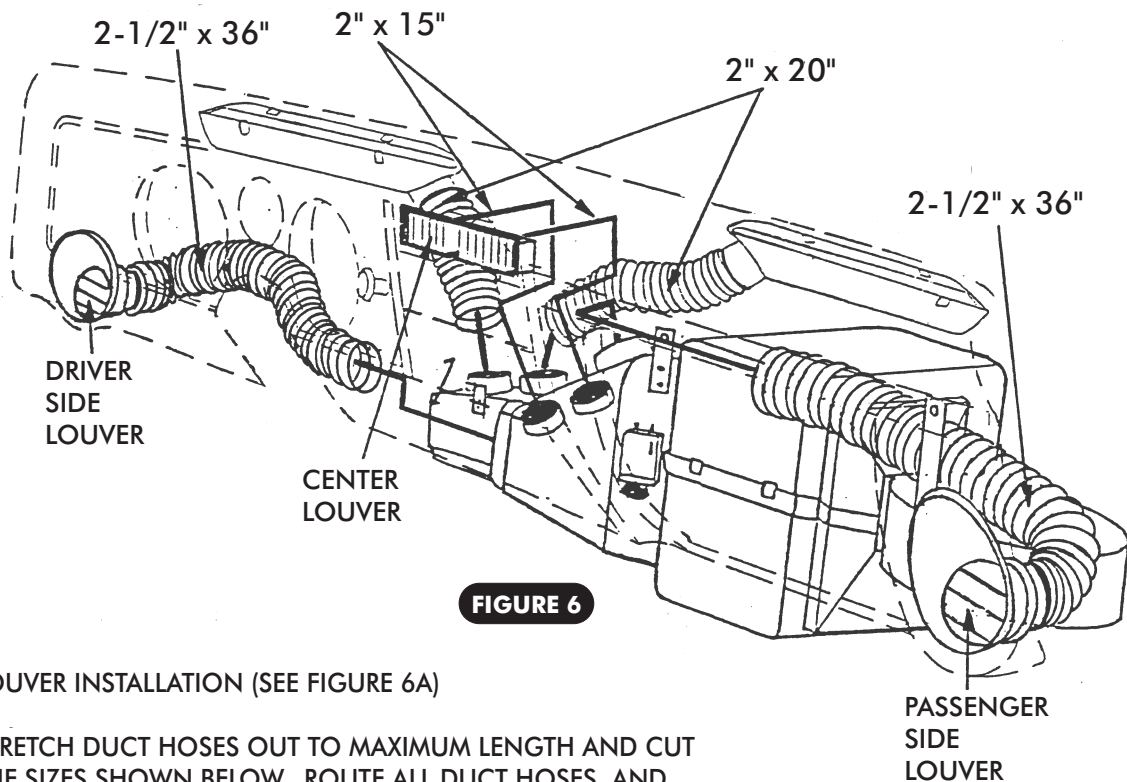

DUCT HOSE INSTALLATION


FIGURE 6

8. LOUVER INSTALLATION (SEE FIGURE 6A)
9. STRETCH DUCT HOSES OUT TO MAXIMUM LENGTH AND CUT THE SIZES SHOWN BELOW. ROUTE ALL DUCT HOSES, AND ATTACH TO DEFROST AND A/C VENTS. (SEE FIGURE 6).


NOTE: WITH THE UNIT IN PLACE, STRETCH THE DUCT HOSES TIGHTLY TO THEIR CORRESPONDING OUTLETS ON THE UNIT, AND RECHECK THE LENGTH. ENSURE THAT THE HOSE IS PULLED TIGHTLY WITH A MINIMUM OF KINKS OR SHARP BENDS. THIS WILL ENSURE MAXIMUM AIR FLOW THRU THE HOSE.

DUCT HOSE LENGTH:

DRIVERS SIDE VENT: 2-1/2" x 36"	(1 HOSE)
DRIVERS SIDE DEFROST VENT: 2" x 20"	(1 HOSE)
CENTER LOUVER: 2" x 15"	(2 HOSES)
PASSENGER SIDE DEFROST: 2" x 20"	(1 HOSE)
PASSENGER SIDE VENT: 2-1/2" x 36"	(1 HOSE)

10. DRILL A 5/8" HOLE 1" BELOW THE FIREWALL COVER, AND IN-LINE WITH THE DRAIN TUBE IN THE BOTTOM OF THE UNIT. INSERT A 1/2" DRAIN HOSE THRU THE FIREWALL AND ATTACH TO THE DRAIN TUBE ON THE UNIT.

HOSE ADAPTER INSTALLATION

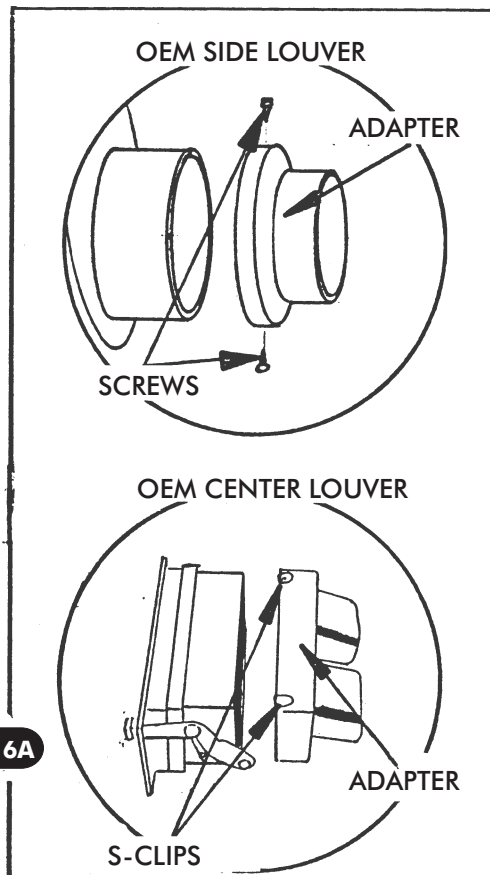
FIGURE 6A

HEATER HOSE INSTALLATION

INSTALL HEATER HOSES AND HEATER VALVE AS SHOWN IN FIGURE 7 BELOW.

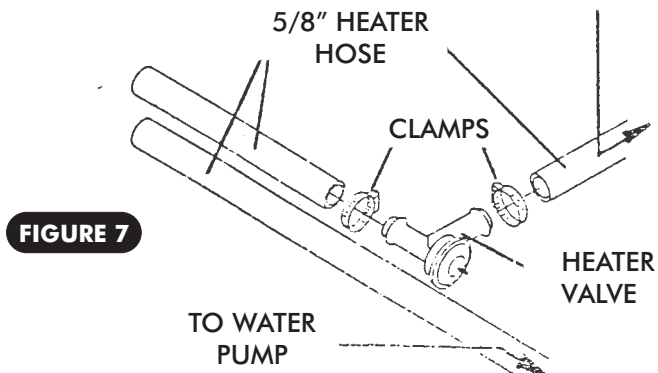


FIGURE 7

PASSENGER SIDE KICK PANEL

CUT OUT JUST THE OEM VENT DOOR OUT OF THE KICK PANEL AS SHOWN IN FIGURE 7A. USE THE KICK PANEL BULKHEAD (SUPPLIED) AS A TEMPLATE.

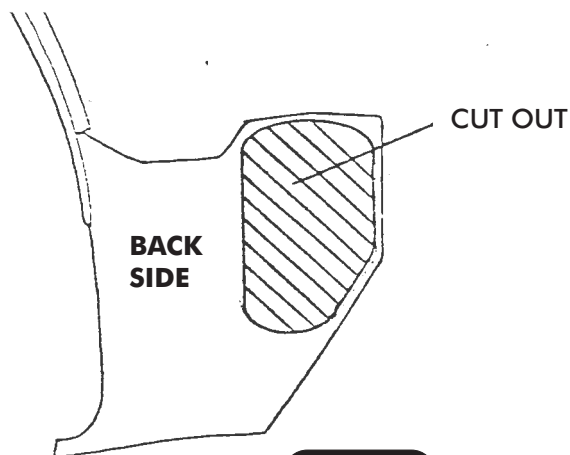


FIGURE 7A

GLOVE BOX INSTALLATION

1. INSTALL NEW GLOVE BOX AS SHOWN IN FIGURE 7b.
2. RE-ATTACH ALL ITEMS PREVIOUSLY REMOVED AT THIS TIME.

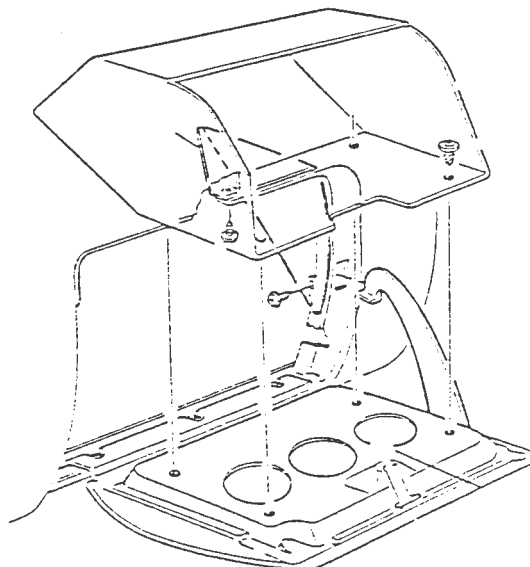


FIGURE 7B

RADIATOR SUPPORT MODIFICATION

1. DRILL A 1 1/4" HOLE IN THE LOCATION SHOWN IN FIGURE 8 BELOW. A 1/8" PILOT HOLE MAY BE NEEDED TO INSURE PROPER LOCATION OF THE 1 1/4" HOLE.
2. INSTALL THE RUBBER GROMMETS (SUPPLIED), ONE IN THE OEM HOLE AND ONE IN THE 1 1/4" HOLE IN RADIATOR SUPPORT. SEE FIGURE 8 BELOW.

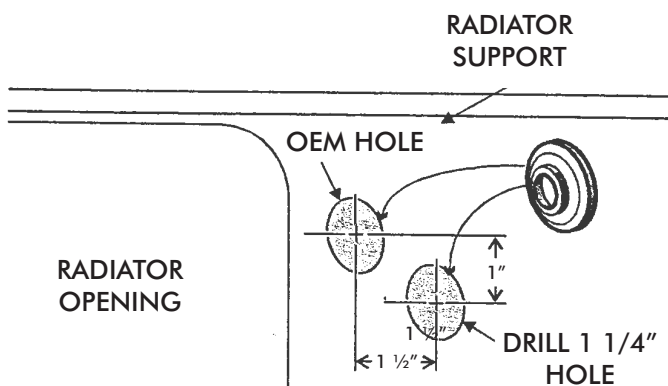


FIGURE 8

OEM CABLE INSTALLATION

1. ATTACH THE OEM CONTROL CABLES USING THE PLASTIC SLEEVES AND PUSH-ON RINGS. SEE FIGURE 9 BELOW.

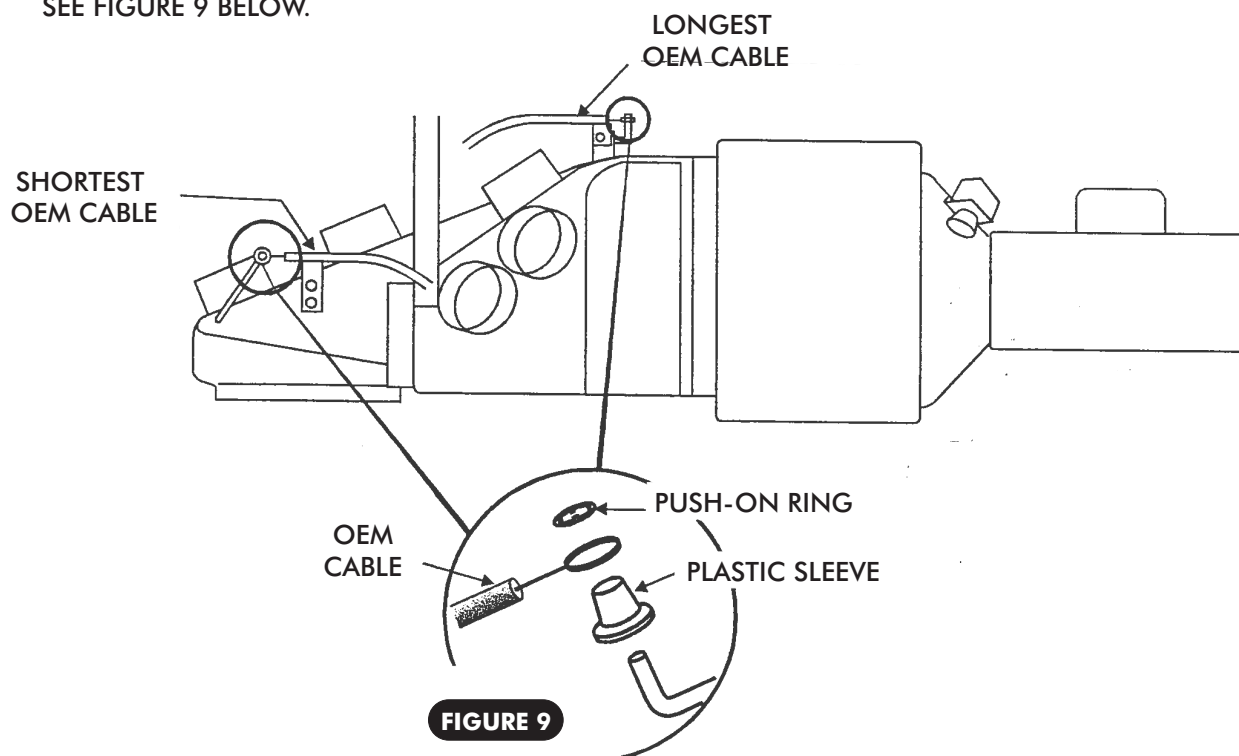


FIGURE 9


ENGINE COMPARTMENT

COMPRESSOR


1. REFER TO SEPARATE INSTRUCTIONS (INCLUDED WITH COMPRESSOR BRACKET) TO INSTALL COMPRESSOR BRACKET.
2. INSTALL COMPRESSOR AND BRACKET USING HARDWARE INCLUDED WITH BRACKET.

CONDENSER ASSEMBLY INSTALLATION

1. REMOVE HOOD LATCH AS FIGURE 10 SHOWS.

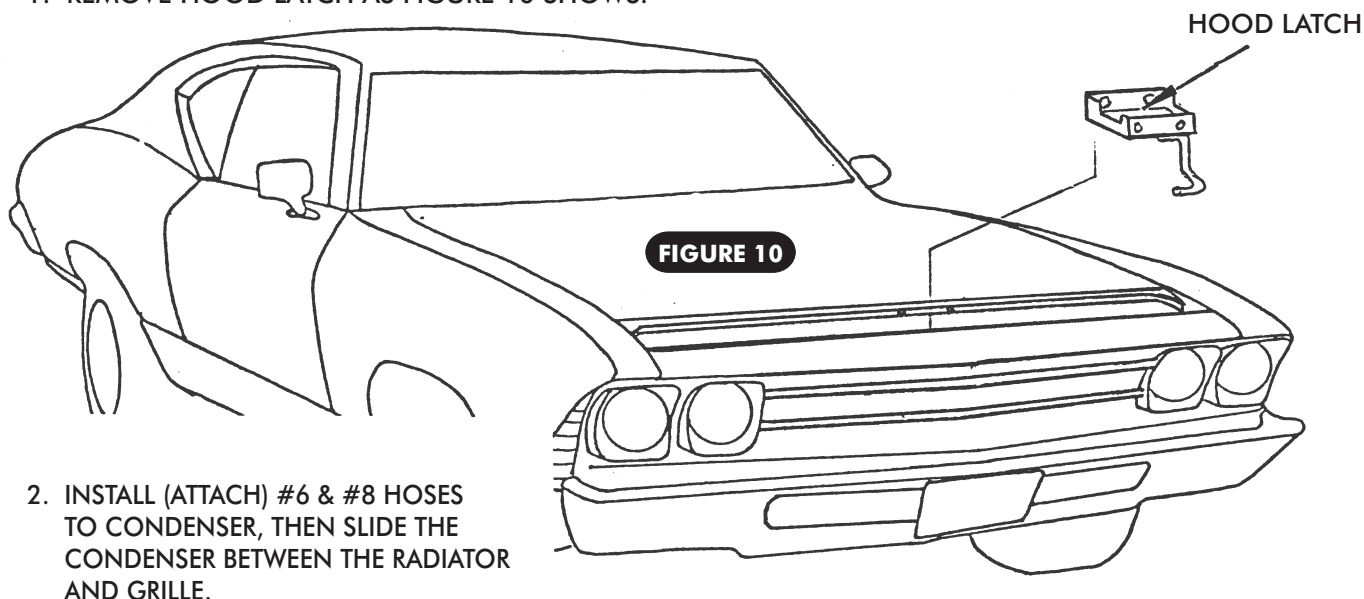

2. INSTALL (ATTACH) #6 & #8 HOSES TO CONDENSER, THEN SLIDE THE CONDENSER BETWEEN THE RADIATOR AND GRILLE.
3. THE CONDENSER ASSEMBLY MOUNTS UNDER THE HOOD LATCH AND LOWER HOOD LATCH SUPPORT BRACE MOUNTING POINT THAT IS BELOW THE RADIATOR (SEE FIGURE 12, PAGE 13).
4. ONCE THE CONDENSER IS IN PLACE, RE-INSTALL THE HOOD LATCH AND TIGHTEN BOLTS.
5. PASS THE #6 & #8 HOSES THRU THE RUBBER GROMMETS PREVIOUSLY INSTALLED IN STEP 2 ON THIS PAGE INTO ENGINE COMPARTMENT.

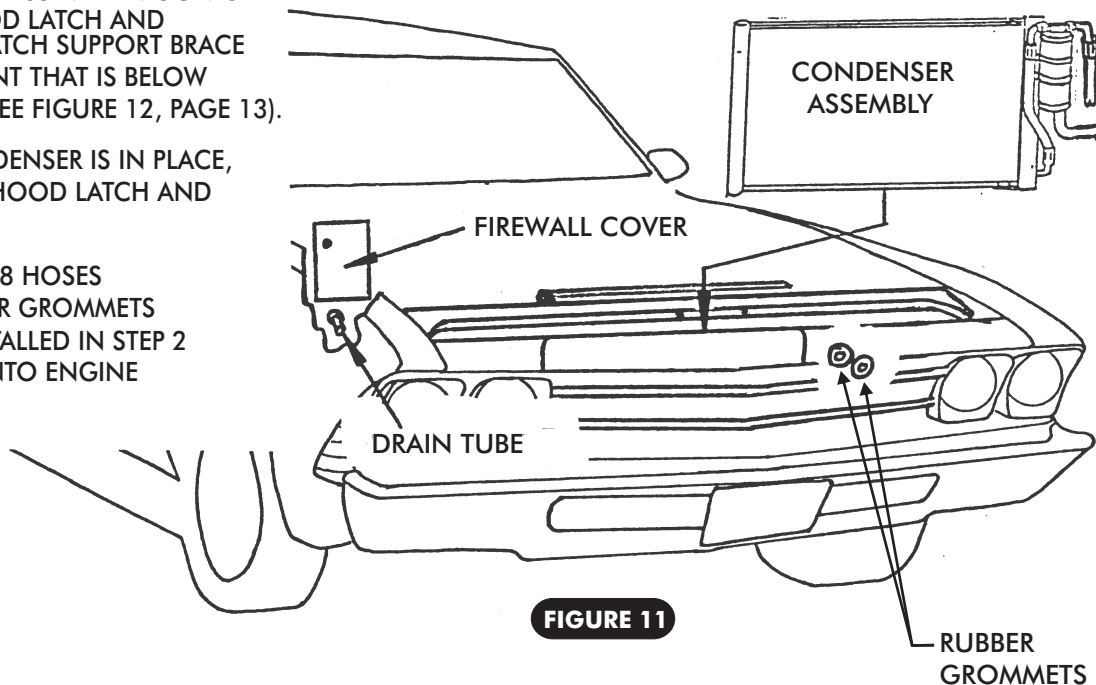

CONDENSER ASSEMBLY INSTALLATION

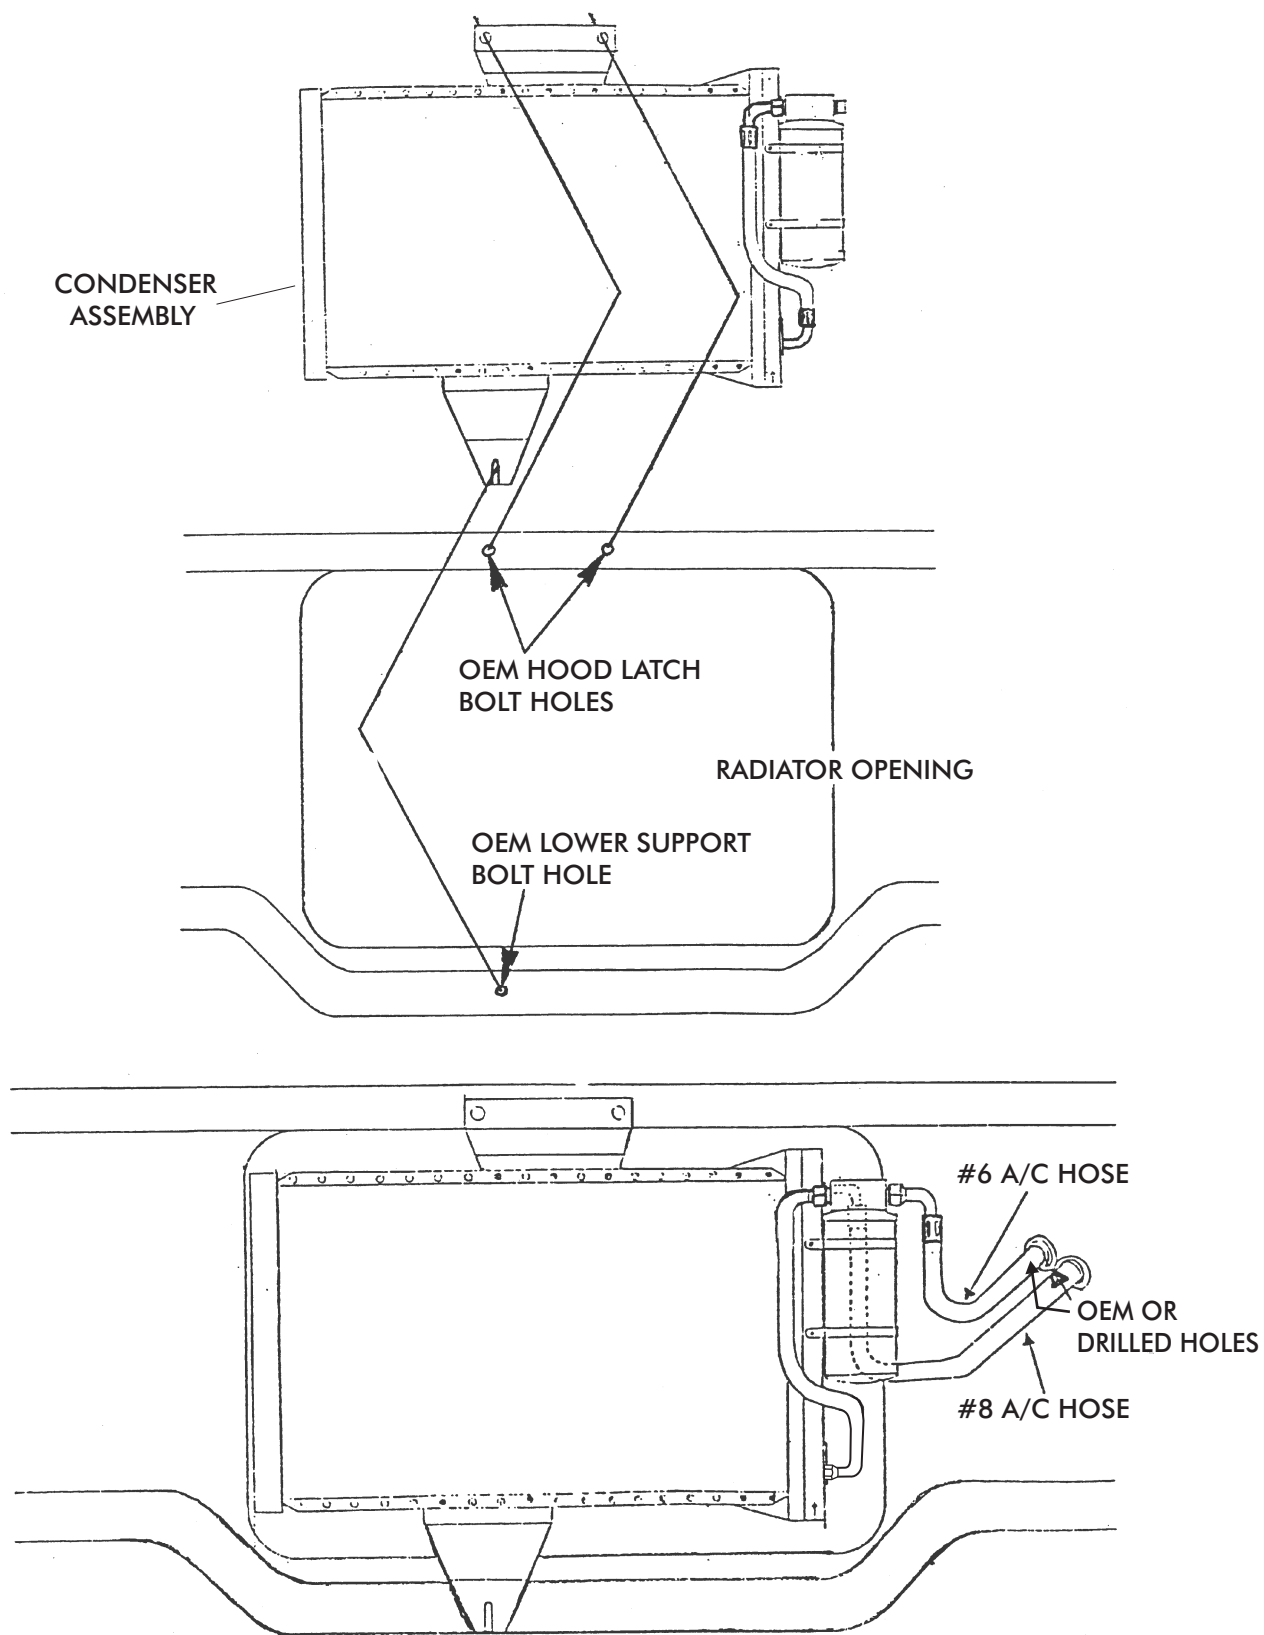


FIGURE 12


REFRIGERATION HOSES (FIGURE 13)

NOTE: PRIOR TO INSTALLING REFRIGERATION LINES, LUBRICATE AND SLIDE THE CORRESPONDING O-RING ON THE FITTING

1. LUBRICATE AND ATTACH #10 SUCTION HOSE TO THE COMPRESSOR (1/2" I.D. HOSE 79" LONG STRAIGHT FEMALE O-RING FITTING ON FIREWALL END AND 135° FEMALE O-RING FITTING ON COMPRESSOR END).
2. LUBRICATE AND ATTACH #8 DISCHARGE HOSE TO THE COMPRESSOR (13/32" I.D. HOSE 45" LONG WITH 90° FEMALE O-RING FITTING ON CONDENSER END AND 135° FEMALE O-RING FITTING ON COMPRESSOR END).
3. LUBRICATE AND ATTACH #6 LIQUID HOSE FROM EVAPORATOR TO DRIER (5/16" I.D. HOSE 115" LONG WITH 90° FEMALE O-RING FITTING ON EVAPORATOR END AND 90° FEMALE O-RING FITTING ON THE DRIER.)

INSTALL HEATER HOSES AND HEATER VALVE AS SHOWN IN FIGURE 8, PAGE 11. INSTALL HEATER CONTROL VALVE IN PRESSURE (INTAKE MANIFOLD) HEATER HOSE LINE.

NOTE: THE HEATER HOSES FOR THIS APPLICATION NEED TO BE 5/8" x 6' EACH (HEATER HOSES ARE NOT SUPPLIED).

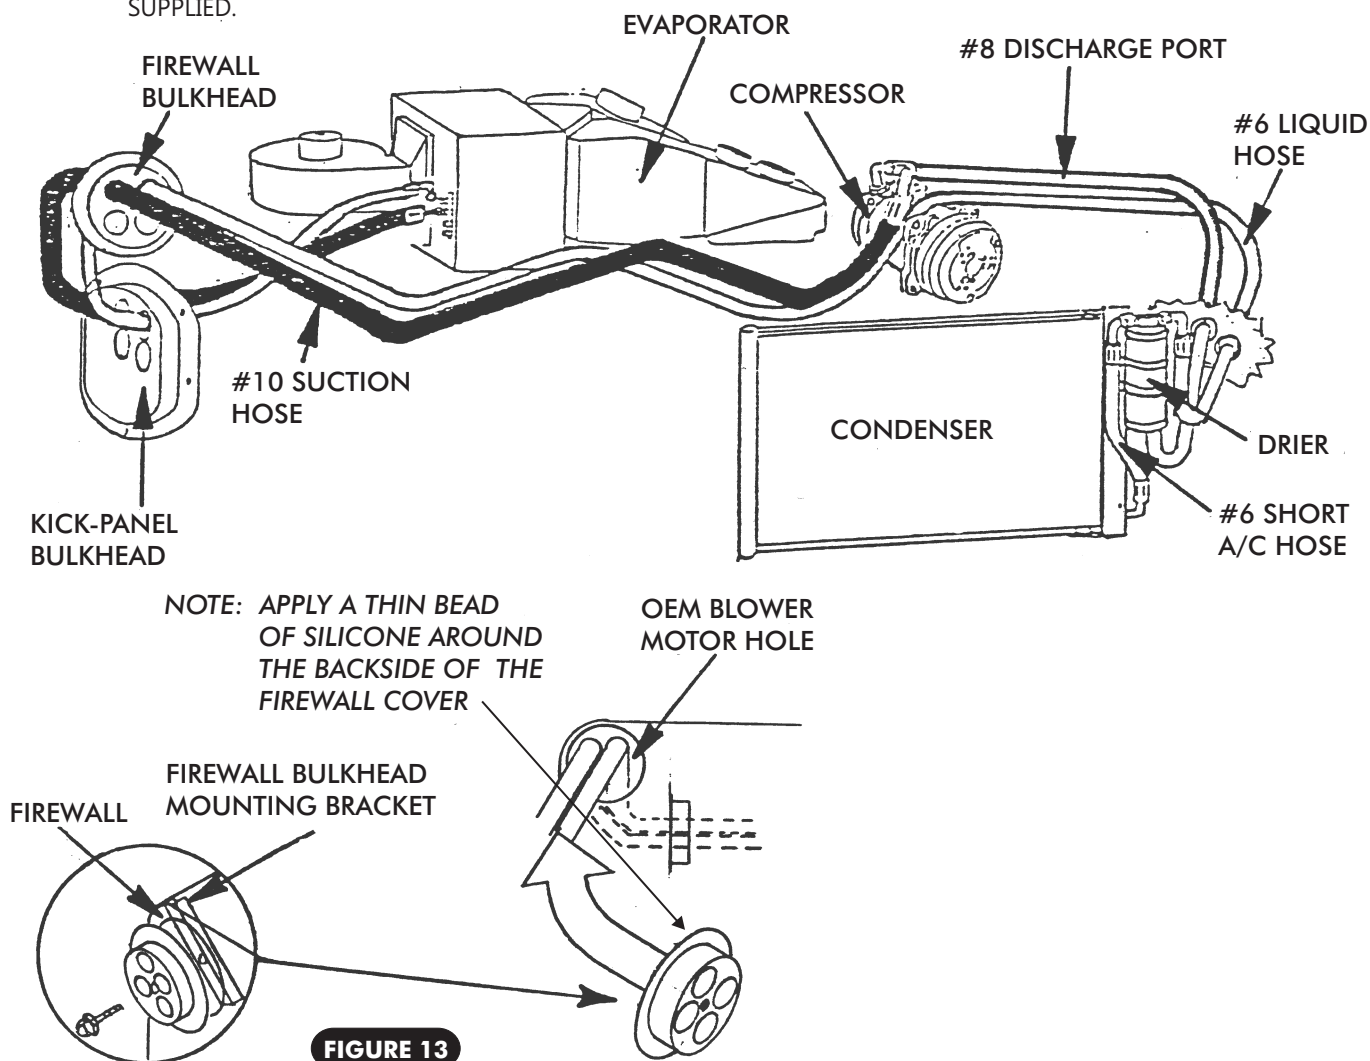


YOUR SYSTEM IS READY TO EVACUATE AND CHARGE. THIS SHOULD BE DONE ONLY BY A CERTIFIED AIR-CONDITIONING TECHNICIAN.


RE-ATTACH ALL COMPONENTS IN REVERSE ORDER OF REMOVAL.

OPERATION OF CONTROLS


THIS APPLICATION USES OEM CABLES AND FAN SWITCH. REFER TO THE WIRING DIAGRAM FOR INSTRUCTIONS ON HOW TO HOOK UP THE OEM FAN SWITCH. REFER TO THE OEM CONTROL CABLE INSTALLATION DIAGRAM FOR OEM CONTROL CABLE INSTALLATION.

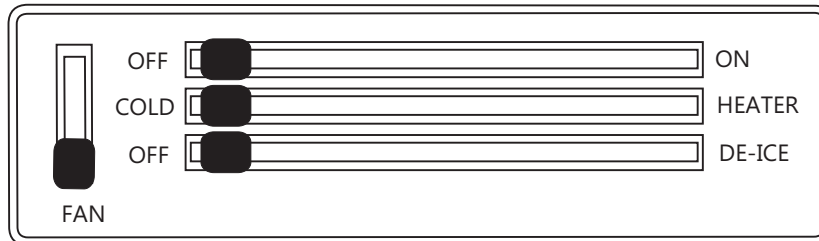


OFF

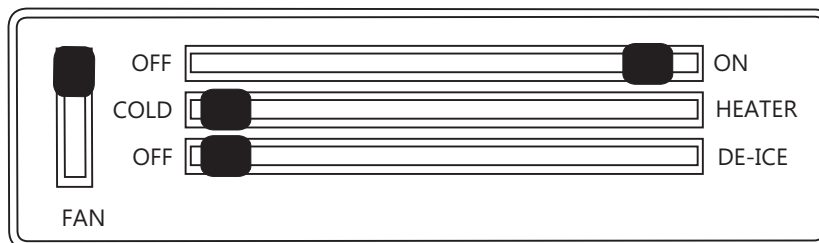


A/C MODE

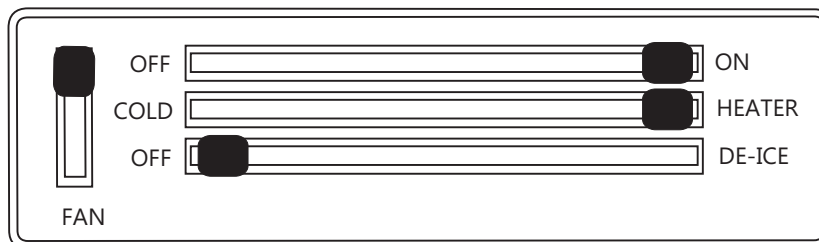

HEAT MODE

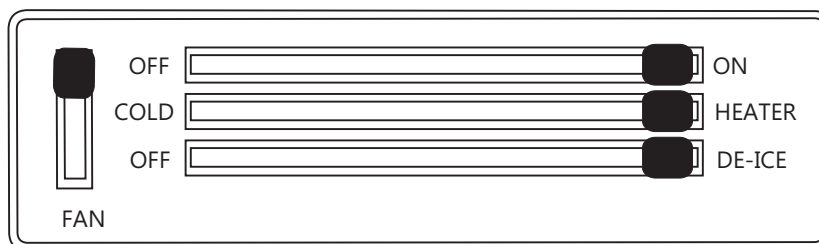

DEFROST MODE

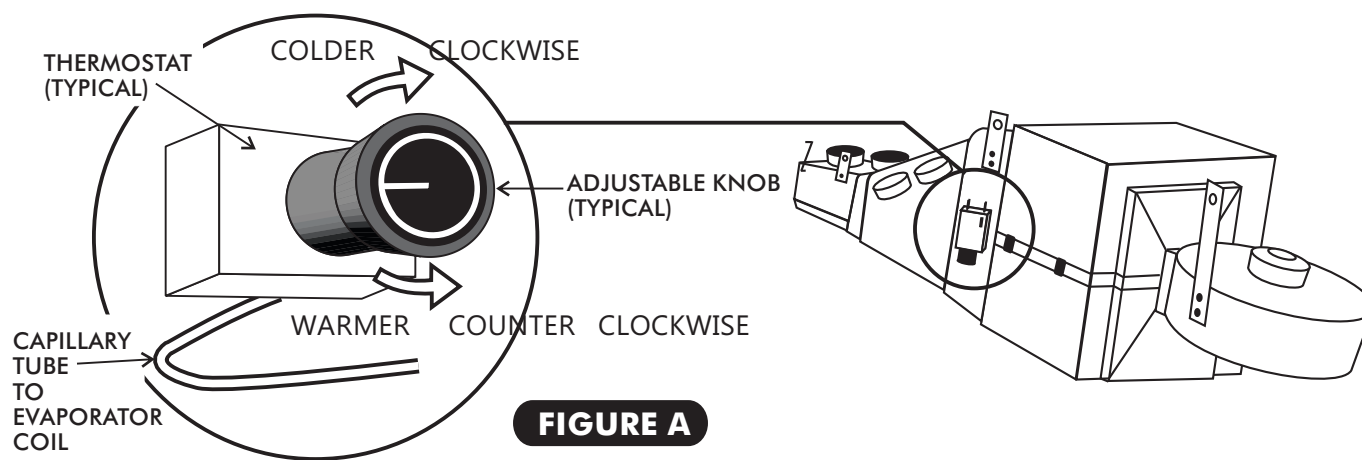

AIR CONDITIONING ADJUSTMENTS:

- THE AIR CONDITIONER THERMOSTAT CONTROLS COIL TEMPERATURE, IT IS SHIPPED ADJUSTED FULLY COLD (CLOCKWISE), IN THE MAJORITY OF CASES THE A/C WILL OPERATE CORRECTLY AS SHIPPED.
- TURNING THE KNOB ON THE THERMOSTAT TO THE RIGHT (CLOCKWISE) MAKES THE SYSTEM OPERATE COLDER. IF THE THERMOSTAT IS SET TOO COLD THE EVAPORATOR WILL "ICE UP" - THE EVAPORATOR COIL IS RESTRICTED WITH ICE AND COLD AIR FLOW WILL BE REDUCED.
- TURNING THE KNOB TO THE LEFT (COUNTER CLOCKWISE) MAKES THE SYSTEM OPERATE WARMER. THE COMPRESSOR CLUTCH WILL CYCLE OFF FREQUENTLY AND THE A/C SYSTEM WILL NOT GET AS COOL AS IT COULD.

ADJUSTING A/C THERMOSTAT

1.) SYMPTOM: THE A/C WORKS WELL AT FIRST THEN QUILTS COOLING. THE AIR FLOW FROM THE VENTS IS LOW AND THE COMPRESSOR CYCLES INFREQUENTLY.

SOLUTION: THE THERMOSTAT IS SET TOO COLD AND THE EVAPORATOR IS "ICING UP" AND RESTRICTING AIR FLOW. ALLOW THE ICE TO MELT AND SET THE THERMOSTAT WARMER (COUNTER CLOCKWISE) 10% OF A TURN EACH ADJUSTMENT UNTIL THE SYMPTOMS DIMINISH.


2.) SYMPTOM: A/C NEVER GETS COLD AND THE COMPRESSOR CLUTCH CYCLES FREQUENTLY.

SOLUTION: THE THERMOSTAT IS SET TOO WARM. SET THE THERMOSTAT COLDER (CLOCKWISE) 10% OF A TURN EACH ADJUSTMENT UNTIL THE COMPRESSOR CLUTCH CYCLES INFREQUENTLY. AVOID SETTING THE THERMOSTAT TOO COLD.

3.) SYMPTOM: THE A/C NEVER GETS COLD, SOMETIMES EVEN BLOWS HOT, AND THE A/C COMPRESSOR CLUTCH INFREQUENTLY CYCLES OFF.

SOLUTION: THE HEATER MAY BE ON AT ALL TIMES. CAREFULLY FEEL AROUND THE HEATER HOSES AT THE FIREWALL. THEY SHOULD BE COLD WHEN THE A/C IS ON. IF THE HOSES ARE HOT THEN:



- A) - THE HEATER CONTROL VALVE MAY BE INSTALLED BACKWARDS. CHECK THE FLOW DIRECTION ARROW ON THE VALVE AGAINST THE ILLUSTRATION IN YOUR INSTALLATION INSTRUCTIONS.
- B) - CABLE OPERATED: THE VALVE MAY BE MISADJUSTED.
- C) - HEATER CONTROL VALVE IN WRONG HEATER HOSE.

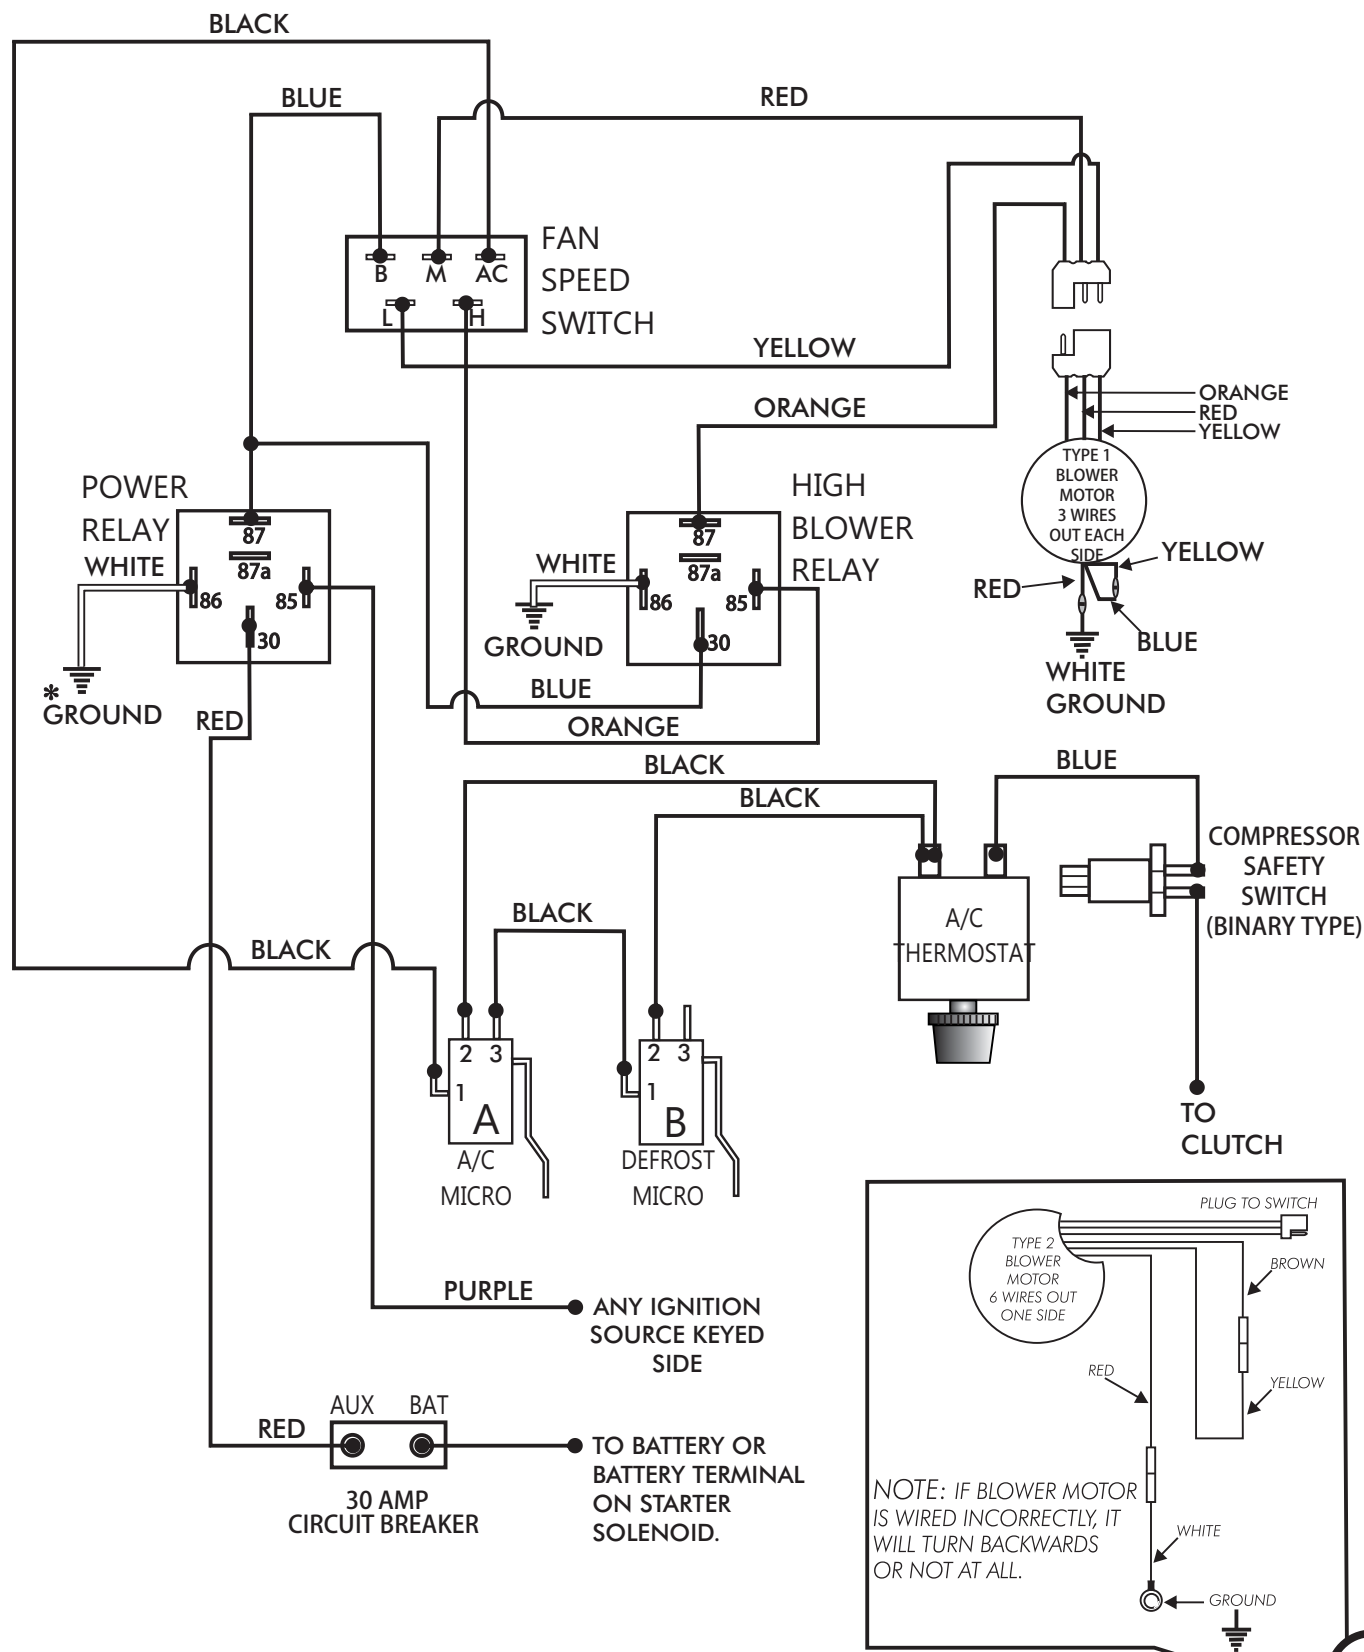

**1968-69 CHEVELLE w/o FACTORY AIR
EVAPORATOR KIT PACKING LIST**
**EVAPORATOR KIT
55069-VCZ-A**

No.	QTY.	PART No.	DESCRIPTION
1.	1	55369-VCE-A	EVAPORATOR SUBCASE
2.	1	78169-ACN	1968-70 CHEVELLE W/O AC ACCESSORY KIT

CHECKED BY: _____
 PACKED BY: _____
 DATE: _____

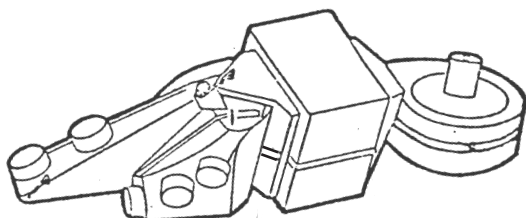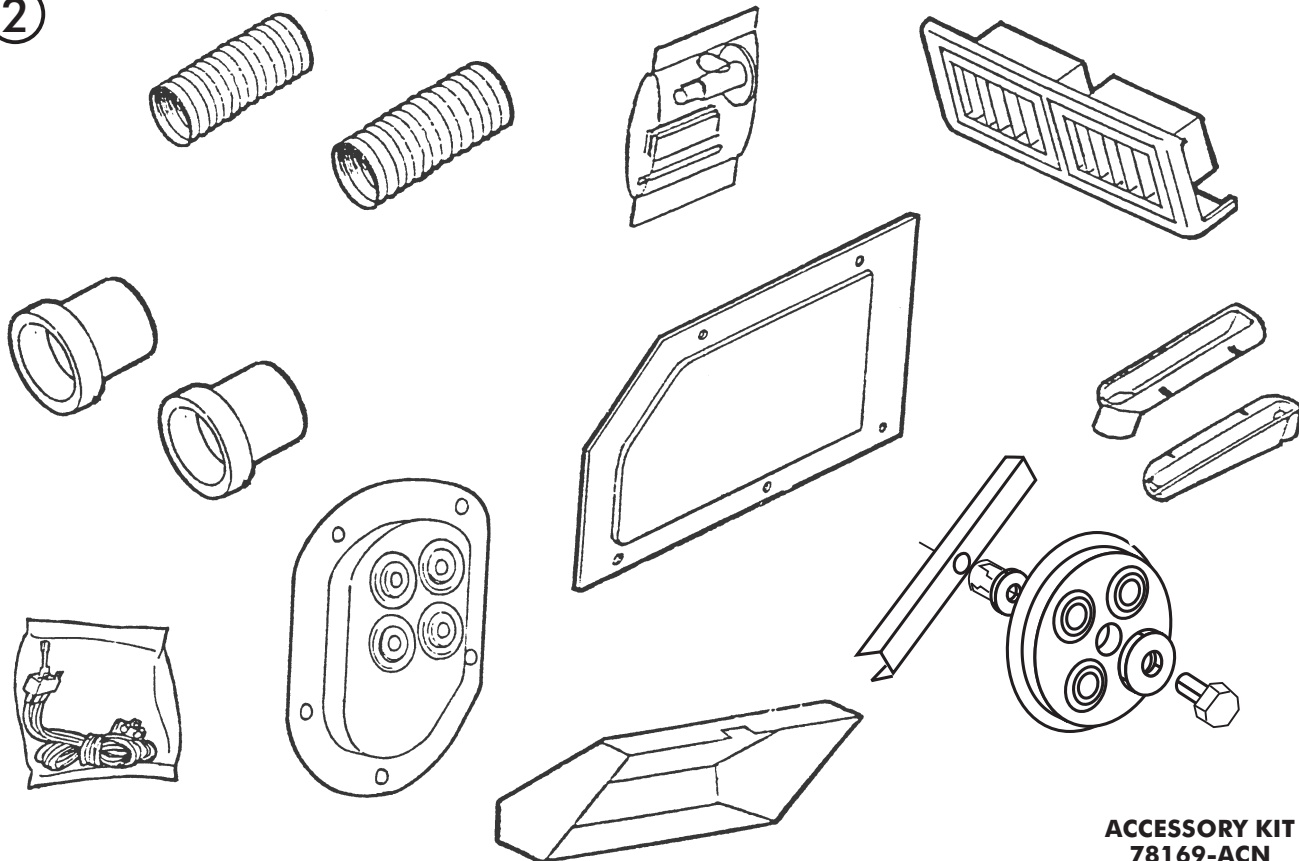①

②

**ACCESSORY KIT
78169-ACN**